

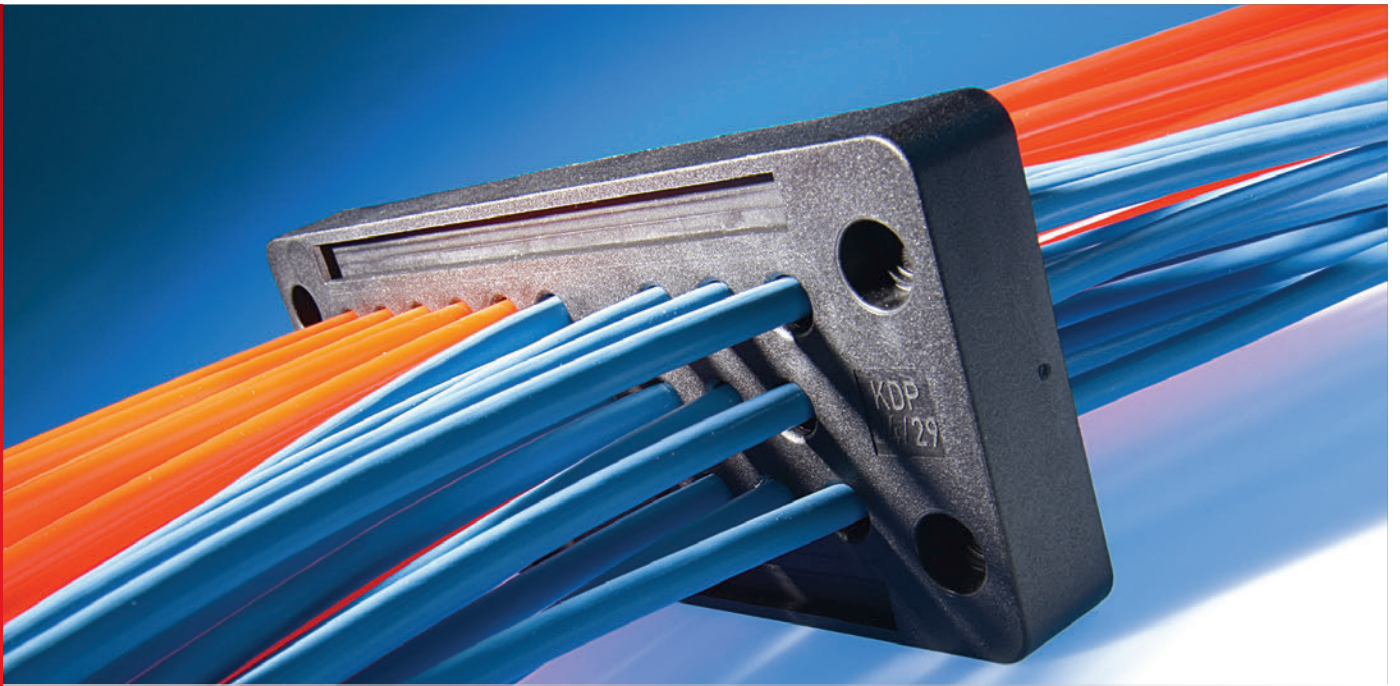


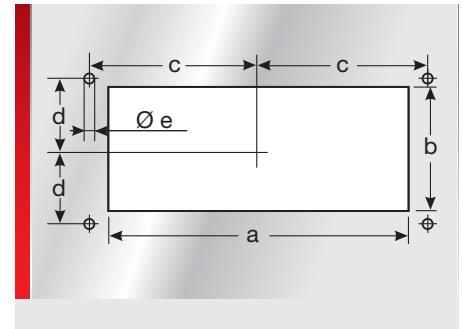

Cable entry plate KDP plastic, rectangular

Cable entry plate plastic, type KDP/N 24

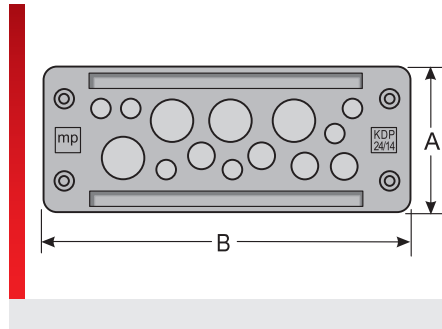

PRODUCT INFORMATION

2. generation of our cable entry plates plastic, square with improved clip-in function. Economical connection technology for tool-free wiring of equipment and machinery. Whenever the rapid and economical introduction of cables and/or pneumatic hoses in confined spaces is essential. The alternative to cable fittings. Suitable for standard cut-outs for 24-pin

Harting and Wieland connectors. For snap-in fastening and/or screwing in place.

- Snap-in at plate thicknesses of 1.5 to 2.0 mm (0.06 – 0.08 in.)
- High degree of strain relief
- 2 elastomer panels (seals)

SPECIFICATIONS

	-22.00 – 158.00 °F
	Enclosure: Polyamide 6.6 Seal: TPU / NBR / EPDM
	IP 65





Type	Part number	Color	No. Openings	Openings Quantity / Ø inch	Pack qty.
KDP/N 24/10 ¹⁾	87301108	black	10	2x 0.12 – 0.26	1.00
				1x 0.2 – 0.36	
				5x 0.35 – 0.55	
				2x 0.55 – 0.79	
KDP/N 24/11	87301110	black	11	4x 0.12 – 0.26	1.00
				4x 0.2 – 0.36	
				3x 0.55 – 0.79	
KDP/N 24/12	87301120	black	12	12x 0.31 – 0.47	1.00
KDP/N 24/13	87301130	black	13	2x 0.12 – 0.22	1.00
				6x 0.16 – 0.32	
				4x 0.35 – 0.55	
				1x 0.55 – 0.79	
KDP/N 24/14	87301140	black	14	6x 0.12 – 0.26	1.00
				4x 0.2 – 0.36	
				4x 0.38 – 0.63	
KDP/N 24/17	87301150	black	17	17x 0.2 – 0.36	1.00
KDP/N 24/17-1	87301151	black	17	11x 0.12 – 0.26	1.00
				1x 0.16 – 0.32	
				5x 0.31 – 0.49	
KDP/N 24/22	87301160	black	22	16x 0.12 – 0.26	1.00
				4x 0.2 – 0.36	
				2x 0.31 – 0.49	
KDP/N 24/23	87301170	black	23	23x 0.16 – 0.32	1.00
KDP/N 24/29	87301180	black	29	29x 0.12 – 0.26	1.00

Type	Part number	Color	No. Openings	Openings Quantity / Ø inch	Pack qty.
KDP/N 24/80	87301190	black	80	78x 0.06 – 0.1	1.00
				2x 0.1 – 0.2	
1) No UR approval					

[illegible]

Cable entry plate plastic, type KDP/X 24

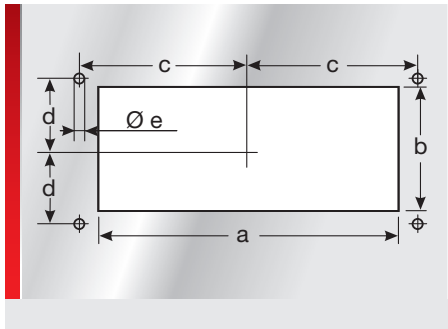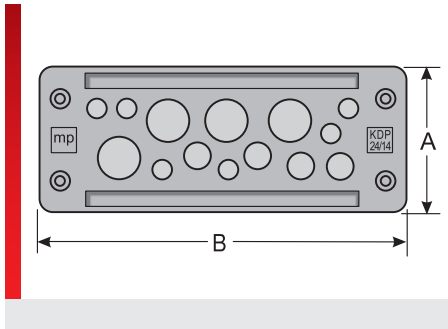

PRODUCT INFORMATION

4. Generation of our plastic cable entry plates, rectangular with improved clip-in function and only one elastomer panel. Economical connection technology for tool-free wiring of equipment and machinery. Wherever the rapid and economical introduction of cables and/or pneumatic hoses in confined spaces is essential. The alternative to cable fit-

tings. Suitable for standard cut-outs for 24-pin Harting and Wieland connectors. For snap-in fastening and/or screwing in place.

- Snap-in at plate thicknesses of 1.5 to 2.0 mm (0.06 – 0.08 in.)
- High degree of strain relief

SPECIFICATIONS

-22.00 – 158.00 °F

Enclosure: Polyamide 6.6
Seal: TPU / EPDM



IP 65

Type	Part number	Color	No. Openings	Openings Quantity / Ø inch	Pack qty.
KDP/X 24/10 ¹⁾	87301305	black	10	2x 0.12 – 0.26	1.00
				1x 0.2 – 0.36	
				5x 0.35 – 0.55	
				2x 0.55 – 0.79	
KDP/X 24/11	87301315	black	11	4x 0.12 – 0.26	1.00
				4x 0.2 – 0.36	
				3x 0.55 – 0.79	
KDP/X 24/12	87301325	black	12	12x 0.31 – 0.47	1.00
KDP/X 24/13	87301335	black	13	2x 0.12 – 0.22	1.00
				6x 0.16 – 0.32	
				4x 0.35 – 0.55	
				1x 0.55 – 0.79	
KDP/X 24/14	87301345	black	14	6x 0.12 – 0.26	1.00
				4x 0.2 – 0.36	
				4x 0.38 – 0.63	
KDP/X 24/17	87301355	black	17	17x 0.2 – 0.36	1.00
KDP/X 24/17-1	87301356	black	17	11x 0.12 – 0.26	1.00
				1x 0.16 – 0.32	
				5x 0.31 – 0.49	
KDP/X 24/22	87301365	black	22	16x 0.12 – 0.26	1.00
				4x 0.2 – 0.36	
				2x 0.31 – 0.49	
KDP/X 24/23	87301375	black	23	23x 0.16 – 0.32	1.00
KDP/X 24/29	87301385	black	29	29x 0.12 – 0.26	1.00

Type	Part number	Color	No. Openings	Openings Quantity / Ø inch	Pack qty.
1) No UR approval					

[illegible]

Cable entry plate, type KDP/E 24

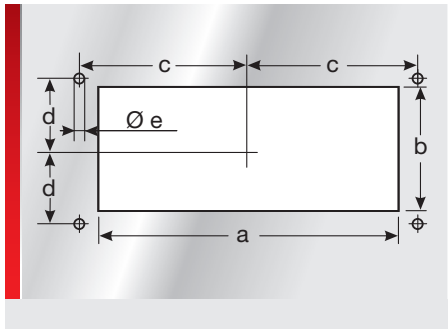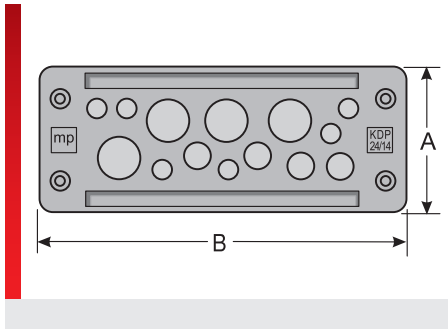

PRODUCT INFORMATION

3. Generation of our plastic cable entry plates, rectangular with improved clip-in function and only one elastomer panel. Economical connection technology for tool-free wiring of equipment and machinery. Whenever the rapid and economical introduction of cables and/or pneumatic hoses in confined spaces is essential. The alternative to cable fittings. Suitable for standard cut-outs for 24-pin

Harting and Wieland connectors. For snap-in fastening and/or screwing in place.

- Snap-in at plate thicknesses of 1.5 to 2.0 mm (0.06 – 0.08 in.)
- Lower strain relief
- Introduction of larger cable diameters is possible
- Introduction from both sides is possible

SPECIFICATIONS

-22.00 – 158.00 °F

Frame: Polyamide 6.6
Seal: TPU / EPDM




IP 65

Type	Part number	Color	No. Openings	Openings Quantity / Ø inch	Pack qty.
KDP/E 24/11	87301310	black	11	4x 0.12 – 0.26	1.00
				4x 0.2 – 0.36	
				3x 0.55 – 0.79	
KDP/E 24/12	87301320	black	12	12x 0.31 – 0.47	1.00
KDP/E 24/13	87301330	black	13	2x 0.12 – 0.22	1.00
				6x 0.16 – 0.32	
				4x 0.35 – 0.55	
				1x 0.55 – 0.79	
KDP/E 24/14	87301340	black	14	6x 0.12 – 0.26	1.00
				4x 0.2 – 0.36	
				4x 0.38 – 0.63	
KDP/E 24/17	87301350	black	17	17x 0.2 – 0.36	1.00
KDP/E 24/17-1	87301351	black	17	11x 0.12 – 0.26	1.00
				1x 0.16 – 0.32	
				5x 0.31 – 0.49	
KDP/E 24/22	87301360	black	22	16x 0.12 – 0.26	1.00
				4x 0.2 – 0.36	
				2x 0.31 – 0.49	
KDP/E 24/23	87301370	black	23	23x 0.16 – 0.32	1.00
KDP/E 24/29	87301380	black	29	29x 0.12 – 0.26	1.00

Dimension table

[illegible]

Cable entry plate KDP 24-Multi

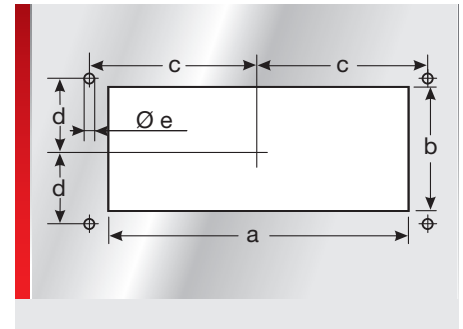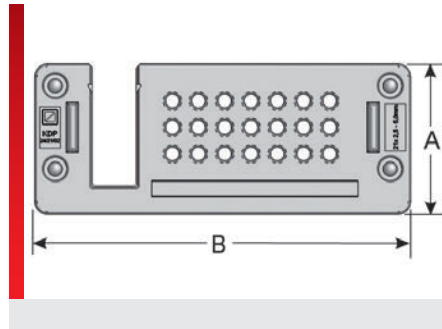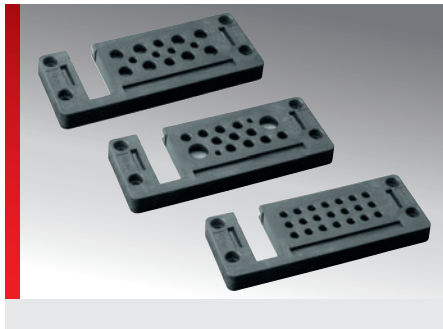

PRODUCT INFORMATION

The cable entry plates, type KDP 24-Multi are a combination of our KDP system and our cable entry strips KDL/E. They are ideal for situations where a few cables with connectors have to be brought into the control cabinet next to cables without connectors. These cable entry plates take up to four preassembled cables in two grommets.

- Catch hook for 1.5 – 2.0 mm (0.06 – 0.08 in.) plate thickness included with delivery, additional catch hooks for up to 4.1 mm (0.16 in.) plate thickness available

SPECIFICATIONS

	-22.00 – 158.00 °F
	Enclosure: Polyamide Seal: TPU / NBR / EPDM
	IP 54
	
	

Type	Part number	Color	No. Openings	Openings Quantity / Ø inch	No. Grommets	Pack qty.
KDP 24/10/02	87301076	black	10	4x 0.12 – 0.26 2x 0.18 – 0.33 4x 0.31 – 0.49	2	1.00
KDP 24/14/02	87301078	black	14	4x 0.1 – 0.2 2x 0.12 – 0.26 8x 0.18 – 0.33	2	1.00
KDP 24/15/02	87301080	black	15	2x 0.06 – 0.14 11x 0.12 – 0.26 2x 0.33 – 0.49	2	1.00
KDP 24/17/02	87301082	black	17	17x 0.12 – 0.26	2	1.00
KDP 24/20/02	87301084	black	20	4x 0.06 – 0.14 6x 0.12 – 0.2 10x 0.12 – 0.26	2	1.00
KDP 24/21/02	87301086	black	21	21x 0.1 – 0.2	2	1.00



Dimension table

Type	Part number	Installation height inch	A inch	B inch	a inch	b inch	c inch	d inch	e inch
KDP 24/10/02	87301076	0.61	2.28	5.75	4.41	1.42	2.56	0.63	0.22
KDP 24/14/02	87301078	0.61	2.28	5.75	4.41	1.42	2.56	0.63	0.22
KDP 24/15/02	87301080	0.61	2.28	5.75	4.41	1.42	2.56	0.63	0.22
KDP 24/17/02	87301082	0.61	2.28	5.75	4.41	1.42	2.56	0.63	0.22
KDP 24/20/02	87301084	0.61	2.28	5.75	4.41	1.42	2.56	0.63	0.22

Cable entry plate KDP 24-Multi (Continued...)

[illegible]

Cable entry plate plastic, type KDP/F 24

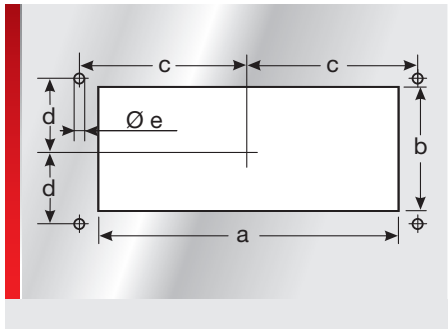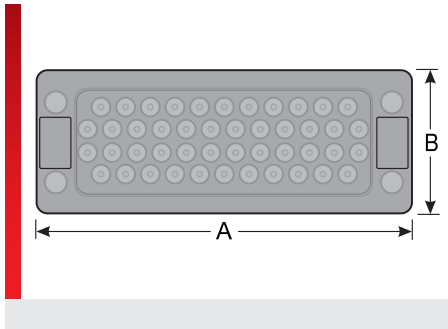

PRODUCT INFORMATION

The KDP/F 24 cable entry plate is an entry and fastening system for cables and pneumatic hoses such as those used in control cabinets, plant or machine construction. Wherever quick assembly, cable-protection and high packing density are required, this cable entry plate can be used.

- Enormous time savings in assembly
- High packing density
- Large wire diameter ranges
- Several cables may be fed through an opening together
- Very flat design

SPECIFICATIONS

 -22.00 – 158.00 °F

 Frame: Polypropylene (PP)
Seal: TPE

 HB

 IP 65

Type	Part number	Color	No. Openings	Openings Quantity / Ø inch	Pack qty.
KDP/F 24-14	87302010	black	14	6x max. 0.35	1.00
				4x max. 0.43	
				4x max. 0.71	
KDP/F 24-14	87302011	black	14	6x max. 0.35	100.00
				4x max. 0.43	
				4x max. 0.71	
KDP/F 24-22	87302020	black	22	16x max. 0.35	1.00
				4x max. 0.43	
				2x max. 0.59	
KDP/F 24-22	87302021	black	22	16x max. 0.35	100.00
				4x max. 0.43	
				2x max. 0.59	
KDP/F 24-28	87302040	black	28	28x max. 0.35	1.00
KDP/F 24-28	87302041	black	28	28x max. 0.35	100.00
KDP/F 24-46	87302050	black	46	46x max. 0.26	1.00
KDP/F 24-46	87302051	black	46	46x max. 0.26	100.00
KDP/F 24-multi	87302030	black	3	3x max. 1.06	1.00
KDP/F 24-multi	87302031	black	3	3x max. 1.06	100.00

